



COLD CHRONICLE



Everything about COLD-CHAIN



UNCONVENTIONAL COOLING

**RAJASTHAN
COLD CHAIN
SUMMIT 2.0**

PHDCCI

**ISHRAE:
COOL CONCLAVE
2024**

Jaipur, Rajasthan

**INDO-JAPAN
JWG MEETINGS
2024**

Bharat Mandapam, New Delhi

**INSULATION:
SPRAY
PU FOAM**

Article

**RENEWABLE
ENERGY SOURCE
FOR COLD STORES**

Article

**CENTRE
OF
EXCELLENCE**

Kartarpur, Punjab

Spray Polyurethane Foam

Spray Polyurethane Foam as Cold Store Envelope

India is seeing dramatic increases in domestic energy consumption. Ongoing industrialization, which includes the proliferation of warehouses and cold stores, and continuing development have already caused energy and peak demand shortages at an average of around 8% and 12% respectively over recent decades.

Buildings are responsible for around 30 percent of global energy use and greenhouse gas emissions, according to the Sustainable Buildings and Climate Initiative of the United Nations Environment Program (UNEP SBCI). The challenges with respect to climate-friendly design are expected to grow in the future. For example, rising temperatures increase the demand for energy-intensive air conditioning systems. Therefore, energy saving buildings of the future can make an even bigger contribution to climate protection than today.

The building sector today already offers a sufficient number of market-ready solutions to support a green cold stores. These solutions can reduce the primary energy requirement by significant levels in cold stores. Standard solutions of the one size fits all variety are inadequate for achieving savings of this size, because in order to build environment-friendly buildings, it is critical to incorporate local climate conditions into the design from the outset. Retrofitted climate control systems would only drive up costs unnecessarily. To minimize the energy requirements of a building, its shape and envelope must be optimized and the building systems designed for maximum efficiency. The right insulation material plays an important role in achieving energy efficiency; much could be achieved if thermal insulation in general were given sufficient consideration from the start, in the planning phase. Studies show that buildings insulated with sprayed polyurethane foam typically use 30 percent less energy for heating and cooling compared to buildings insulated with traditional fibrous insulation material.


Architecture and Energy Savings

The building envelope is our “third skin” (after skin and clothing) where we spend 90% of our daily time. The design and material used in buildings have a direct effect on healthy living. Poor ventilation and high heat transfer coefficient of building materials can lead to condensation and structural damage. Sustainable construction as an all-in solution is a novel idea in the construction industry. Architects and designers usually face technical challenges in the following areas:

- Compact design: surface area to volume ratio.
- Energy-efficient construction: minimizing the U-values, avoiding thermal bridges.
- Excellent thermal insulation in the external components: high insulating efficiency per unit area.
- Wind-tight and air-tight building shell.
- Mechanical ventilation (heat recovery in some cases): limiting the relative humidity.
- Rapidly controllable heat/ cold distribution: adaptability.

The architectural challenge comprises of synthesis of technically perfect construction, correct use of materials, sensible utilization and efficient project planning. Effectively, it boils down to giving the design processes a specific direction governed by external factors like conservation of resources, climate protection, energy efficiency and developing a new aesthetic. With the new role play of architects as stylists and engineers, their responsibilities widen to

- Create appropriate architectural designs from it, not simply “form follows U-value”.
- Author new developments, e.g. in the styling of façades of large, complex buildings.
- Design an energy system, a power station, a living system
- that can respond to changes in the environment.
- Turn the technical requirement to a style challenge.

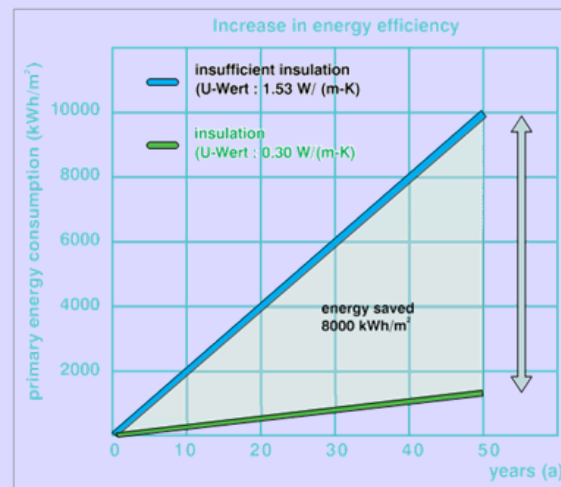

Energy efficiency in architecture would be inconceivable without the use of insulating materials. Optimum energy efficiency can be achieved with high-performance insulating materials such as polyurethane rigid foam. Life Cycle Assessments (LCA) performed on insulation products have demonstrated that energy savings during the use phase far outweigh energy associated with manufacturing the raw material, formulating components, transporting, installing and managing at end-of-life. LCA for some individual chemical product applications, including insulation, were calculated in the ICCA report. The life cycle assessment is a recognized multi-step, well-structured methodology that performs environmental impact analysis (based on ISO 14044:2006). LCA assess energy and environmental impacts of a material in a specified application from cradle to end-of-life.

LCA results support decision-making on new projects and compare the energy and environmental impact of different products with quantitative data factoring in all the life cycle phases. LCA calculations show that the highest values obtained with an increase of insulation can contribute substantially to energy efficiency improvement. It contributes to fossil fuel conservation and greenhouse gas reduction. A building and its shell constitute a system with a long life and a correspondingly long-term energy-saving effect.

Less is More

Insulation takes space. How much depends on the insulating performance of the material used. Rigid foams made of polyurethane insulate better than any other commercially available insulating material. This saves space, provides for thin solutions and even allows for more living space. Insulation effectiveness is a function of the type and thickness of the material used to make it. In this context, the lower the thermal conductivity (λ) of the material, the better its insulating performance.

Against this backdrop, rigid polyurethane foam possesses a unique advantage. Of all the commercially available insulating materials, it exhibits the lowest value at 0.018 watt per meter per degree Kelvin⁴. Other insulating materials, such as polystyrene, rock wool, glass wool or hemp fibers, display significantly higher thermal conductivity values.

Insulating materials are important in the first place because standard building materials, such as concrete, brick and wood, conduct heat relatively well. By comparison, the thermal conductivity of concrete ($\lambda=2.1$) is nearly 90 times higher than that of polyurethane. As a result, even a relatively thin layer of polyurethane one centimeter thick insulates just as well as a concrete wall 90 centimeters thick.

For example, 21 centimeters of polyurethane insulates just as effectively as 28 centimeters of expanded polystyrene or 32 centimeters of mineral wool.

This difference can be of great significance. In the case of new buildings, for instance, walls can be of a thinner design overall when using polyurethane. This ultimately means increased interior space, i.e. more living space. In the same example, the gain with polyurethane for every exterior wall requiring insulation is equivalent to seven centimeters compared with polystyrene and as much as eleven centimeters compared with mineral wool. The same applies for floor, ceiling and roof insulation. In these areas, the use of polyurethane enables the best-possible ceiling height for a given level of insulating performance. Similar advantages exist when subsequently insulating an existing building.

It is often impossible to install layers of insulation on the exterior, either for reasons of space or because it is a landmark building. Interior insulation, on the other hand, inevitably means a loss of living space. As described above, this loss can be minimized by using polyurethane. Even if it is possible to install exterior insulation, the thinner solution with polyurethane still offers the most advantages. However, the use of external spray foam insulation has the added advantage of extending the building life as its minimal thermal mass allows little expansion and contraction due to heat and cold cycles. On the other hand, the solid walls and roofs expand and contract significantly thus resulting in cracks and eventual loss of water proofing and consequent seepage, limiting the building life.

The PUF Advantage

Rigid polyurethane foam is suitable for extended use at temperatures of -30 to $+120^{\circ}\text{C}$. Even contact with the chemical substances typically found in construction, such as adhesives, wood preservatives or bitumen, does not affect polyurethane. The material does not rot, resists mold and is odor-neutral.



Figure 3: Space saving with different insulation materials

Because rigid polyurethane foam has a closed-cell structure, it does not absorb moisture from the air or exhibit capillary activity. This means the usual building dampness does not penetrate the material if installed properly – an important aspect, because otherwise the insulating properties would deteriorate.

The closed-cell structure also ensures that the gas contained in the pores cannot escape. Special facings on rigid PU foams further prevent air from penetrating the material. Both aspects are decisive for maintaining good insulating properties over an extended period of time.



PU and PIR comply with the fire standards

As an organic material, polyurethane is flammable. However, flammability in itself is not the problem. After all, other building materials, such as wood, also burn. What is important is that by adding flame retardants, rigid polyurethane foams can be produced that are classed as having low to normal flammability. They can be used as thermal insulation in virtually every application in the building industry. Classifications of this kind are based on standardized tests.

So an eventual fire cannot spread undetected through an insulation layer. Similarly, the reigniting of a previously extinguished fire is observed just as rarely. Another important aspect in practice is that rigid PU foam does not melt or form flaming droplets in a fire. This distinguishes PU from polystyrene, which softens even at comparatively low temperatures, melts and the flaming droplets can even spread a fire.

A lot of progress has been made in recent years in the field of flame protection for rigid PU foams. For example, new PU formulations with an excess of isocyanate have been developed, known as polyisocyanurate (PIR). The resulting foams are inherently more resistant to heat. They require only one-third the amount of flame retardant contained in older rigid foams.

Conclusion

Over the years, polyurethane foam has emerged as the insulation of choice for building envelopes due to its low conductivity, good gas and vapour barrier properties, low flammability, self-adhesion, chemical stability, construction efficiency and ease of application compared to other insulation materials.

For more details, please visit www.indiainsulationforum.in and <https://sfaindia.net/>



Author: Mr. Isaac Emmanuel

Emmanuel is a post graduate in polymer chemistry from Madras University and has spent the past three decades in the field of engineering polymers industry in India. Having worked extensively with the automotive, sports, industrial, mechanical and railway segments as well as in the construction and Cold Chain segments, besides solar, wind and wood binder markets. He works closely with industry bodies for the cause of sustainability. After 32 years of varied experience with Covestro / Bayer MaterialScience, he now serves as Professor of Practice at Somaiya Vidyavihar University as well as Independent Consultant on promoting sustainable technologies.